


C-101

EPA CERTIFIED

With the new EPA Certified C-101 engine, there is no need to add an expensive catalyst and AFR to meet current EPA emissions requirements, saving you thousands of dollars per engine.

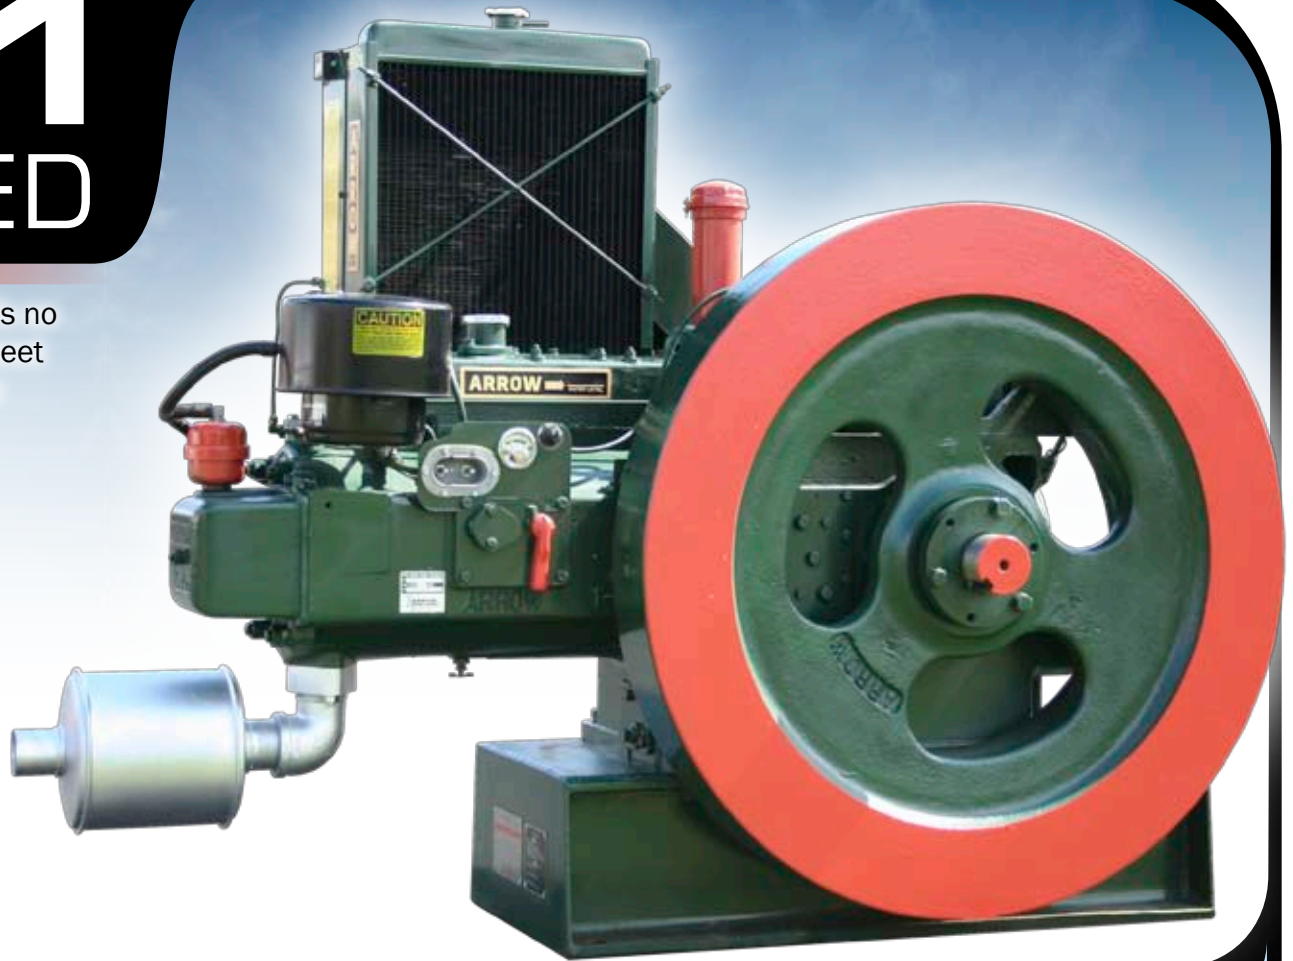

- BHP Range - max** 19 - 24.5
 - RPM Range** 400 - 800
 - Continuous Duty RPM** 24.5 HP @ 800 RPM
 - Bore & Stroke** 7.5 x 8.5
 - Displacement** 376 CI (6.4 Liters)
 - Compression Ratio** 6.2:1
 - WR(2)** 1760 LB FT2
 - PTO Shaft Size** 2 1/4" (57.2 mm)
 - Oil Capacity*** 11 QT (10.4 L)
 - Water Capacity** 20 QT (19 L)
 - Spark Plug Size** 18 mm
 - Exhaust Connection** 2 1/2" NPT
 - Fuel Gas Pipe Size** 1/2" NPT
 - MTG. Bolts: Qty - Size** 4 - 1"
 - Shipping Weight** 2975 LBS
 - Truck Load Quantity**** 16
 - Ignition** Solid State Ignition
 - Fuel** Gaseous
 - Lubrication** Full Pressure
 - Oil Filtration** Replaceable Full Flow Filter
 - Clutch PTO (Double Bearing)** SP-111-HP-3
 - Starting Equipment** 12 Volt Ring Gear Starter Standard
 - Safety Controls** Water Level & Oil Pressure Standard
- Oil filter changes add 1 QT. *
- 45' Truck Bed **



ARROW

ENGINE COMPANY

a TRIMAS company



2301 E. Independence, Tulsa, OK 74110
 TOLL FREE 800.331.3662 Local 918.583.5711
 Toll Free Fax in US & Canada 800.266.1481 Fax 918.699.2202
 Copyright July 2009 www.arrowengine.com