

INSTALLATION INSTRUCTIONS

VR BAFFLED RADIATOR

Arrow's baffled radiator improves engine cooling system efficiency by separating trapped air and steam from the coolant. Two additional hoses are required. One connects the top tank to the inlet side of the water pump. The other connects the top tank to the thermostat housing. See Figure 1 for details. On older engines it may be necessary to drill and tap a 1/4 NPT port in the thermostat housing (see Figure 2).


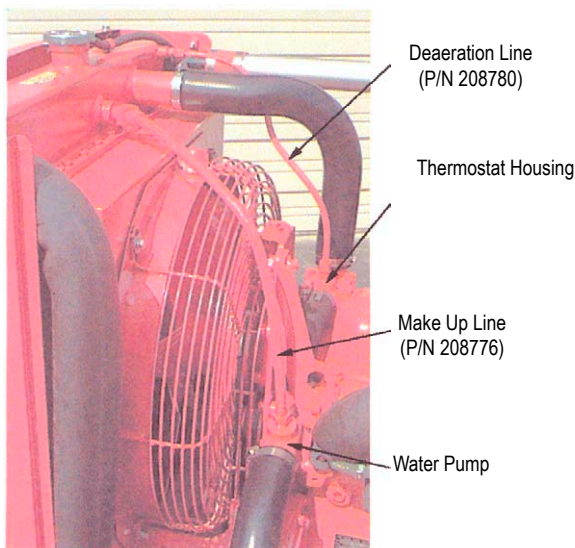


Figure 1



Thermostat Housing
Figure 2

Note: It is extremely difficult to fill system if the 208776 hose is not connected.

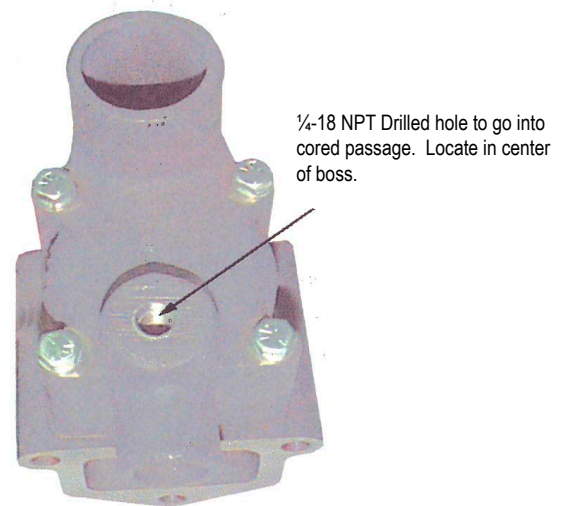

2301 E. Independence St. Tulsa, OK 74110-4900
(918) 583-5711 • 1-800-331-3662
Fax (918) 592-1481 • U.S. and Canada Fax Only 1-800-266-1481
www.arrowengine.com VRRH_f © July 2009