
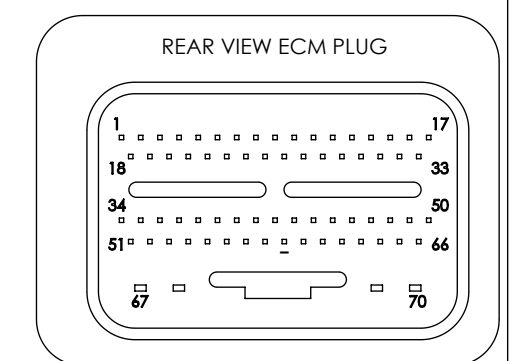
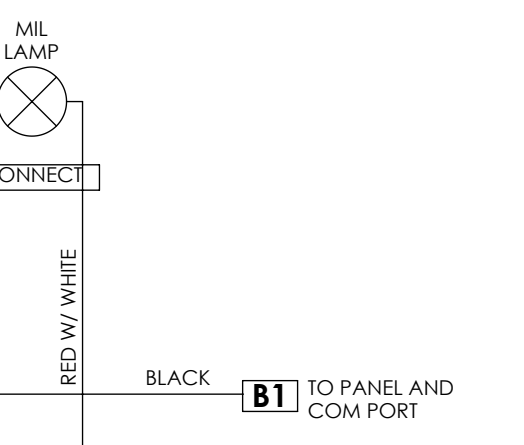


NOTES:  
 GENERAL WIRE COLOR FUNCTION  
 RED = CONSTANT +12 VOLTS  
 RED W / WHITE = SWITCHED +12 VOLTS  
 BLACK = 12 VOLT GROUND  
 ORANGE = SWITCHED +5 VOLTS SENSOR POWER  
 WHITE W / ORANGE = 5 VOLT SENSOR GROUND  
 BLACK W / WHITE = EXTERNAL FUNCTIONS

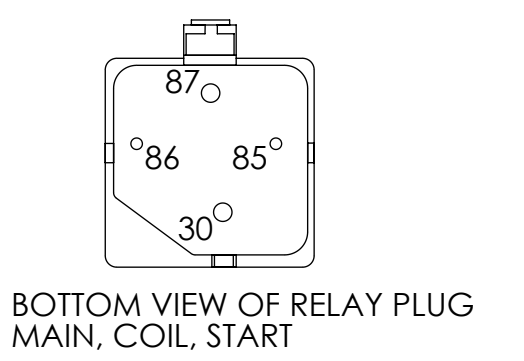

THIS PRINT IS THE PROPERTY OF ARROW ENGINE COMPANY AND MUST NOT BE REPRODUCED OR USED IN ANY MANNER DETRIMENTAL TO INTEREST OF SAID COMPANY				MOD	REF		2301 EAST INDEPENDENCE TULSA, OKLAHOMA 74110	
B	WAS FUEL TYPE 1 SHUT(OFF ADDED (NATURAL GAS); WAS FUEL TYPE 2 SHUT-OFF ADDED (PROPANE); ON PANEL 18 POS DEUTSCH; WAS EX SHUTDOWN ON 6 NOW EX SHUTDOWN 1; WAS EX SHUTDOWN ON 15 NOW EX SHUTDOWN 2	MM	08/05/21	MV	9525		UNLESS OTHERWISE SPECIFIED FRACTIONAL = .015 ANGULAR MACH = 1/2" X ± .040 XX ± .030 XXX ± .010 SURFACE FINISH 125 AA DIMENSIONS ARE IN INCHES BREAK SHOWN CORNERS .010-.030	TITLE SCHEMATIC, MAIN HARNESS 6 CYL
A	IDLE/RATED WAS EX SHUTDOWN ON 15 NOW EX SHUTDOWN 2 AND - TO 13 ON PIEZO BUZZER:	MM	07/16/21	RH	9509	DRAWN MM SCALE NTS CHKD MV ECR 9485 APPD MV DATE 06/16/21		SHEET 1 OF 1 DRAWING NUMBER WR15002
REV	REVISION DESCRIPTION	BY	DATE	APPD	ECR			