


# C-101

## EPA CERTIFIED

With the new EPA Certified C-101 engine, there is no need to add an expensive catalyst and AFR to meet current EPA emissions requirements, saving you thousands of dollars per engine.

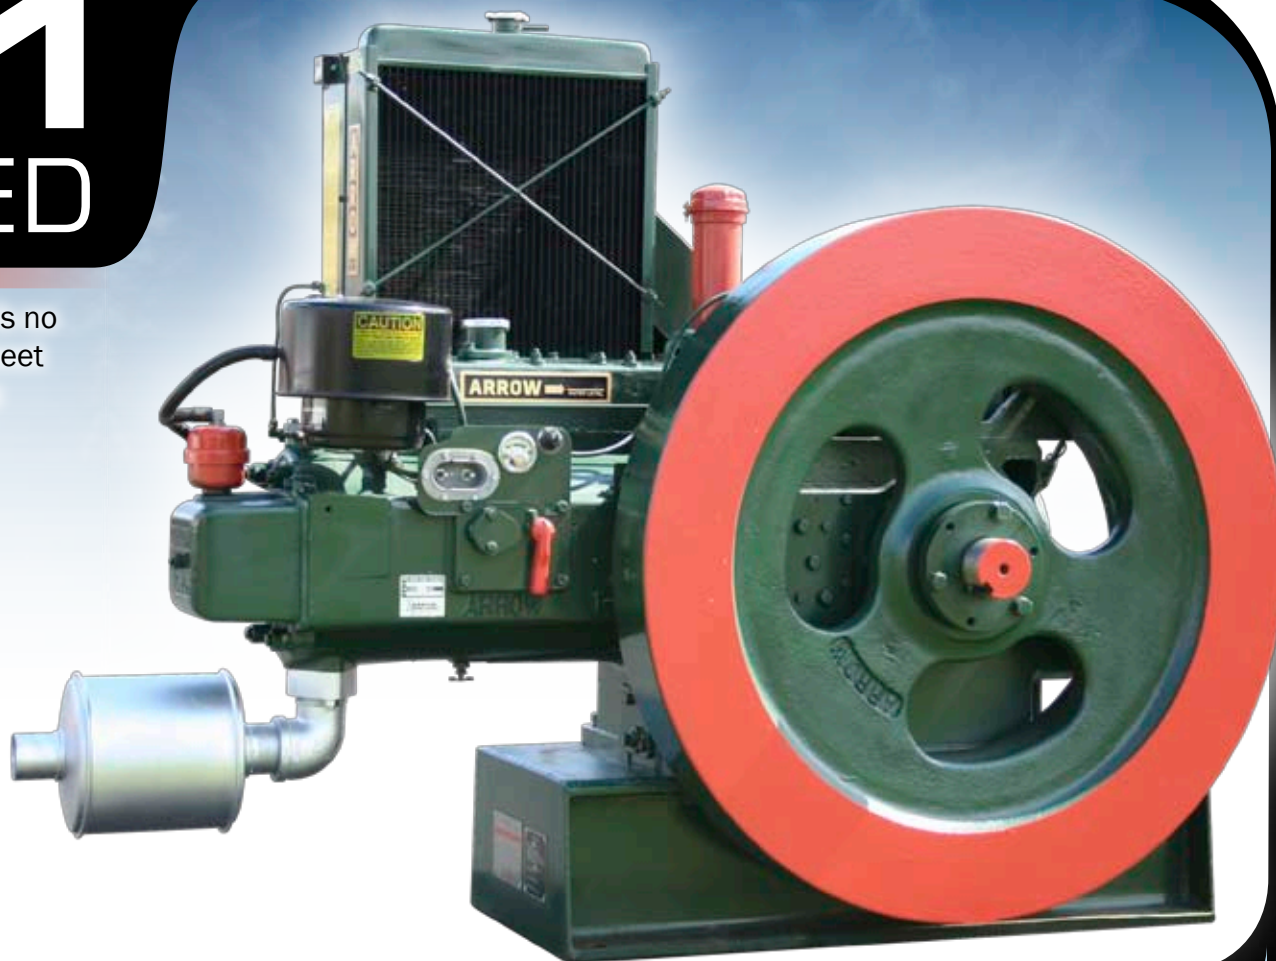

<b>BHP Range - max</b>	19 - 24.5
<b>RPM Range</b>	400 - 800
<b>Continuous Duty RPM</b>	24.5 HP @ 800 RPM
<b>Bore &amp; Stroke</b>	7.5 x 8.5
<b>Displacement</b>	376 CI (6.4 Liters)
<b>Compression Ratio</b>	6.2:1
<b>WR(2)</b>	1760 LB FT2
<b>PTO Shaft Size</b>	2 1/4" (57.2 mm)
<b>Oil Capacity*</b>	11 QT (10.4 L)
<b>Water Capacity</b>	20 QT (19 L)
<b>Spark Plug Size</b>	18 mm
<b>Exhaust Connection</b>	2 1/2" NPT
<b>Fuel Gas Pipe Size</b>	1/2" NPT
<b>MTG. Bolts: Qty - Size</b>	4 - 1"
<b>Shipping Weight</b>	2975 LBS
<b>Truck Load Quantity**</b>	16
<b>Ignition</b>	Solid State Ignition
<b>Fuel</b>	Gaseous
<b>Lubrication</b>	Full Pressure
<b>Oil Filtration</b>	Replaceable Full Flow Filter
<b>Clutch PTO (Double Bearing)</b>	SP-111-HP-3
<b>Starting Equipment</b>	12 Volt Ring Gear Starter Standard
<b>Safety Controls</b>	Water Level & Oil Pressure Standard
Oil filter changes add 1 QT. *	
45' Truck Bed **	



# ARROW

## ENGINE COMPANY



2301 E. Independence, Tulsa, OK 74110  
TOLL FREE 800.331.3662 Local 918.583.5711  
Toll Free Fax in US & Canada 800.266.1481 Fax 918.699.2202  
Copyright July 2009 [www.arrowengine.com](http://www.arrowengine.com)